



OpenStage Xpert

OpenStage Xpert is a reliable, multi-line communications solution for financial, energy, and commodity trade as well as for dispatchers in control centers and Public Safety Answering Points. It increases the workers' efficiency and productivity, while reducing operational costs and complexity.

Multi-line communication

Financial, energy, and commodity trade as well as dispatchers in control centers and Public Safety Answering Points around the world depend on communications. Traders and dispatchers can be responsible for handling hundreds of critical calls a day. Whether it is a many millions dollar trade, vital cargo delivery, or more importantly, human lives; companies depend on fast and reliable communications. OpenStage Xpert makes it easy – delivering unparalleled usability and flexibility to the dispatcher or trader to maximize their effectiveness and efficiency.

OpenStage Xpert overview


The full-scalable communication solution with its compact OpenStage Xpert 6010p terminal enables more than 600 lines to communicate, collaborate, and escalate. Since it is IP-based and supports SIP, it is easy to integrate with existing enterprise telephony solutions. Moreover, it makes it easy to roll-out high ROI communication technologies such as Voice over IP (VoIP), IPTV, Unified Communications (UC) and Fixed-Mobile Convergence (FMC). OpenStage Xpert provides all of the communications features that companies need today.

Because it is designed around open standards, the solution is future-proof.

The OpenStage Xpert terminal balances innovative features and unparalleled flexibility against the security and reliability required of such a mission-critical system.

The large touch screen allows to select up to 200 customizable pages of user interface, enabling up to 12,000 user-definable soft buttons. Additional components include; Push-to-Talk handsets, gooseneck microphone, and external speaker module which was especially designed for voice monitoring. Dispatchers or traders can setup the device exactly the way they want it. All configuration and customization information is stored centrally to facilitate global free seating and disaster recovery.

To reduce the number of moving parts and increase MTBF, OpenStage Xpert uses a CF card and is fanless. In addition, all of the components in the solution are compatible with VMware and can be doubled-up for redundancy and high availability.

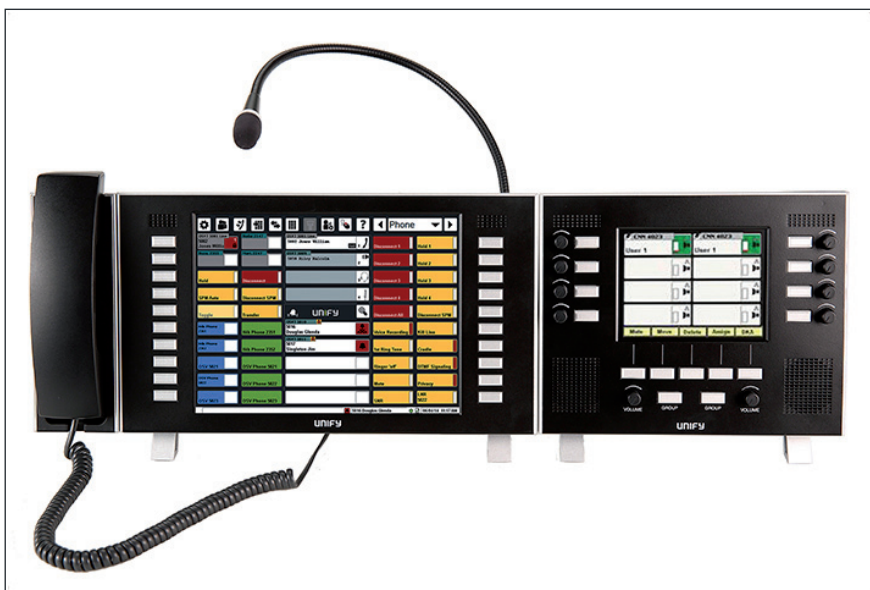

OpenStage Xpert terminal

Main features

Usability

Traders and dispatch operators can use many communication channels simultaneously, and initialize/finish dozens of calls each minute. OpenStage Xpert's crisp 10" touchscreen optimizes the handling of lots of calls per day.

Prioritized call queue

Fast, 1-button access from any screen to incoming and parked calls.

Fast response to missed calls

Inbound call logging and automatic re-dial for missed calls.

Customizable user interface

Up to 200 pages, 12,000 user-definable buttons. Each trader can optimize his terminal for his own needs.

Easy to integrate

TAPI interface and powerful macro language make it easy to integrate with other programs.

Windows Soft Client

Available as a Windows 7 compatible soft client that provides the complete Xpert's functionality on a standard Windows 7 laptop.

Flexibility

Different business and services require different connection types, special input/output devices, and optimized user interfaces. OpenStage Xpert is completely configurable and scalable to each user's specific needs.

Numerous input/output options

Each device can include up to 4 handsets, headsets, or a gooseneck microphone and two additional speaker modules.

Global free seating

Device setup and configuration are stored centrally; user login and authentication allow to use any terminal on the floor.

Multi-language support

Several languages are available for the user interface (English, French, Italian, German, Spanish, Portuguese, Russian, Czech, Slovakian, Polish, Hungarian).

Broad telephony support

Easy provisioning, whatever type and mix of connection is required:

- Standard telecommunication lines (IP & TDM)
- Direct lines (ARD's & MRD's)
- Intercom & Broadcast (Hoots & Hollers)
- Radio and IPTV

Reliability

When human lives or millions of dollars are on the line, communications are mission-critical for the success of the enterprise. OpenStage Xpert is designed from the ground up to be fail-safe and reliable.

Redundant I/O

Dual LAN ports and 6 USB ports for reliable connectivity.

New Distributed Server Architecture (NDSA)

Increases the availability of the whole multi-site system and provides all features to all sites.

VMware support


VMware vSphere 5.5 support provides:

- High Availability (HA) - Automatic restart of virtual machines on another vSphere host when the server or the operating system fails.
- Fault Tolerance (FT) - Automatically triggers stateless failover when the protected virtual machine fails.

Deployment options

OpenStage Xpert can easily be deployed in almost any telecommunication environment, TDM or IP, centralized or distributed architecture. Since it is open standards-based and supports SIP, integration with third-party IP telephony solutions, voice recording or call logging solutions is easy. However, OpenStage Xpert is optimized to work with enterprise telephony solutions providing advanced VoIP and Unified Communications (UC) features.

The OpenStage Xpert Multi-Line Control servers (MLC) make it possible for every workplace to support up to 600 lines, any combination of standard telecommunication lines (TDM or IP), direct lines, hoots & hollers. Replacing expensive direct lines with IP lines can significantly reduce telecommunication costs. OpenStage Xpert System Manager makes it easy for the IT department to setup and configure each Xpert terminal. Each customized user interface is stored in a secure System Manager profile.

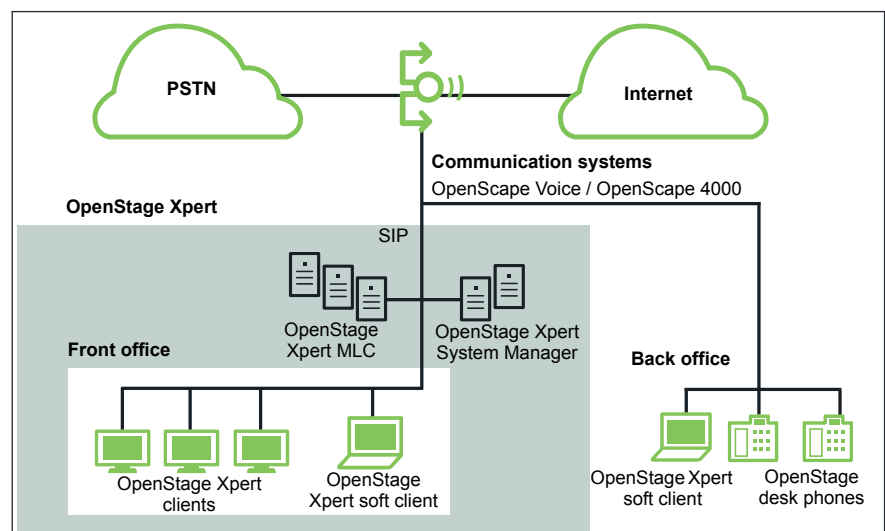

OpenStage Xpert system architecture

Enterprise telephony solutions

We offer a comprehensive, mature ecosystem of enterprise telecommunications products and solutions:

- **OpenScape Voice** is a carrier-grade, native SIP-based soft switch, providing comprehensive voice features across the IP network. It can support up to 3,000 branches and 6,000 business groups with multi-tenant capabilities, and is ideal for large-scale enterprise networks and service

providers. OpenScape Voice includes standard IT virtualization and management options.

- **OpenScape 4000** is the leading converged communications platform for medium and large enterprises. OpenScape 4000 offers high-availability, flexible deployment models, standards-based integration and interoperability with business-critical applications and workflows.

For more information about our enterprise telephony solutions, please visit our website at:
<http://www.unify.com>

OpenStage Xpert options

OpenStage Xpert is expandable and configurable to the unique requirements of each customer:

Item	Description	SKU number
OpenStage Xpert 6010p	The OpenStage Xpert 6010p terminal provides 20 free customizable cabinet buttons. The user interface provides up to 200 pages allowing 12,000 user-definable soft buttons.	L30258-W600-D235
OpenStage Xpert Speaker Module	The OpenStage Xpert Speaker Module supports eight (8) additional speaker channels with high-quality speakers and separate volume control. Each OpenStage Xpert terminal supports up to two (2) Speaker Modules.	L30258-W600-D246
OpenStage Push-to-Talk/Mute handset	The standard OpenStage Xpert handsets are equipped with a talk button that can be used as a Push-to-Talk or Push-to-Mute button. A fixing key switches the handset on permanently.	L30258-W600-D236
OpenStage Handset with volume control	The new OpenStage Xpert handset is equipped with a talk button that can be used as a Push-to-Talk or Push-to-Mute button and includes integrated volume control.	L30258-W600-D248
OpenStage Universal handset cradle	The OpenStage Xpert cradle is usable for all types of handsets. When configured, placing the handset in the cradle automatically disconnects the call. Lifting the handset from the cradle automatically activates an incoming call on the handset.	L30258-W600-D247
Gooseneck microphone	An optional gooseneck microphone plugs into the OpenStage Xpert terminal and operates in handsfree or Push-to-Talk mode.	L30258-W600-D245
Desktop gooseneck microphone	An optional desktop gooseneck microphone with an integrated free-programmable function key can be used in handsfree mode or Push-to-Talk mode.	L30258-W600-D260

OpenStage Xpert 6010p technical data

Power supply	External power supply	
Primary side	Rated voltage	230 V AC
	Voltage range	90 - 264 V AC, 47 - 63 Hz, 1.5 A
	Power consumption max.	65 W
	Bridging of power failures	10 ms
Secondary side	Output voltage	12 VDC
	Max. output current	5 A
	Fuse protection	5 A surge-proof

Input/Output		
	Ethernet	2 x 10/100BT
	USB	6 x V2.0, 480 Mbps, max. 500 mA DC
	Audio	2 x Input Mono 3 x Output Mono 4 x Handset
	Serial (COM)	None
	Parallel (LPT)	None

Processor module	Module, CPU, RAM, GPU, hard disk	
	CPU	1.67 GHz single core
	Cache	512 kByte
	Chipset	ICH8M
	Main memory	1 GByte
	Mass memory	CompactFlash 2 GByte
	GPU	3D video controller, Intel® Extreme Graphics®
	Cooling	Passive

Mechanical properties		
	Width x depth x height	338 x 60 x 193 mm (13.5" x 7.5" x 2.3")
	Mounting	Stand-alone, adjustable tilt and 75 mm VESA support
	Weight	Approx. 2.6 kg

Environmental conditions		
	Storage temperature	-25 ... +55 °C (-13 ... +131 °F)
	Transport temperature	-25 ... +70 °C (-13 ... +158 °F)
	Operating temperature	+5 ... +40 °C (+41 ... +104 °F)
	Vibration	Not required
	Shock	Not required
	Front protection	IP40
	Rear protection	IP20

Copyright © Unify Software and Solutions GmbH & Co. KG, 02/2016
Mies-van-der-Rohe-Str. 6, 80807 Munich/Germany

All rights reserved.

Reference No.: A31002-X2040-D100-4-7629

The information provided in this document contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract.

Availability and technical specifications are subject to change without notice.

Unify, OpenScape, OpenStage and HiPath are registered trademarks of Unify Software and Solutions GmbH & Co. KG. All other company, brand, product and service names are trademarks or registered trademarks of their respective holders.